




MY LED LIGHTING GUIDE

YOUR GUIDE TO ENERGY EFFICIENT LED LIGHTING

EASY INSTALLATION

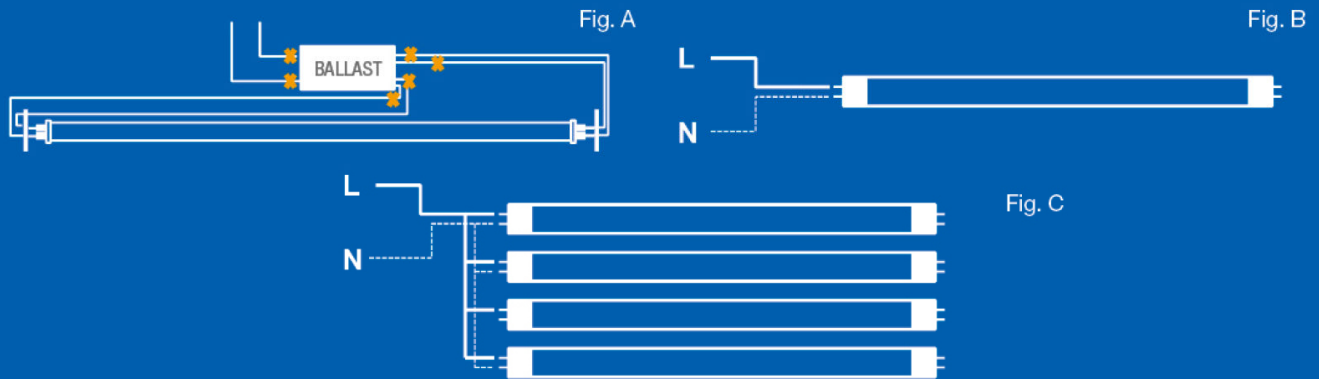

1. Bypass ballast by cutting all the wires in Fig A.
2. Replace shunted lamp holder with non-shunted lamp holder if applicable. A non-shunted lamp holder has the ability to attach 2 wires and send +ve to one pin and -ve to the other pin. Only one lamp holder per tube needs to be non-shunted, as the LED tubes accept power to only one end.
3. Directly wire Live + and Neutral - to the single non-shunted lamp holder as per figure B.
4. Existing fixture maintains its original UL Compliance as the tube provided has been designed and tested to the UL1598C standard.