


MY LED LIGHTING GUIDE

YOUR GUIDE TO ENERGY EFFICIENT LED LIGHTING

LED Airport Tarmac Flood Light

Replaces: 400W | 1000W | 2000W Metal Halide

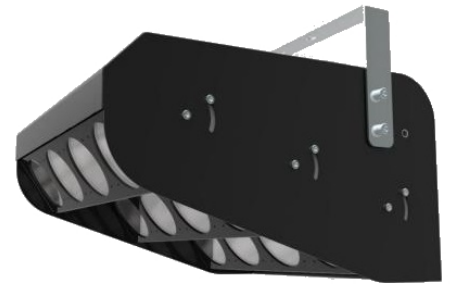

Models and Specifications

Part Number	Watts	Lumens	Replaces	Dimensions	Net Weight
MLLG-LED-AIR-FLD-150-[Color]	150	22,500	400W	12X10X6	13.2
MLLG-LED-AIR-FLD-200-[Color]	200	30,000	750W	16X12X6	17.5
MLLG-LED-AIR-FLD-300-[Color]	300	45,000	1000W	29X16X6	27.5
MLLG-LED-AIR-FLD-400-[Color]	400	52,000	1000W	18X16X10	28.5
MLLG-LED-AIR-FLD-600-[Color]	600	78,000	1500W	20X18X12	35
MLLG-LED-AIR-FLD-800-[Color]	800	104,000	2000W	28X20X12	39.6 lbs
MLLG-LED-AIR-FLD-1000-[Color]	1000	130,000	2000W		

Lumens Per Watt	130 150
Voltage	100-277V [D] 277-480V [HV]
Frequency	50/60 hz
Power Factor	> .95
THD	< 15%
Life Hours	70,000 hours
Color Temperature	3000K 5500K 6500K
CRI	80+
Beam Angle	25° 40° 60° 90°
Operating Temperature	-25C to +55°C
IP Rating	IP66
Dimmable	Yes
Warranty	5 years

Features

- LED Airport Tarmac Flood Light with PWM Drivers to maintain color temperature accuracy
- Designed to control light spillage. Light is controlled - left and right throw - and is dark sky compliant
- Anti Glare - each light bar can be adjusted for optimal placement to ensure pilots vision is not affected
- Highly efficient 130-150 lumens/watt
- Replace 2000W Metal Halide - easily
- ETL Listed with a 5 year warranty
- Trunnion mount or wall mount (other mounts available)

Product enhancements may result in specification changes without notice. Contact us for the latest information

www.MyLEDLightingGuide.com (888) 423-3191