


## 100W Shoebox Retrofit

Part No: MLLG-LED-RETRO5[A]-100-[Color]-[HV] 1152

Replaces: 400W Metal Halide

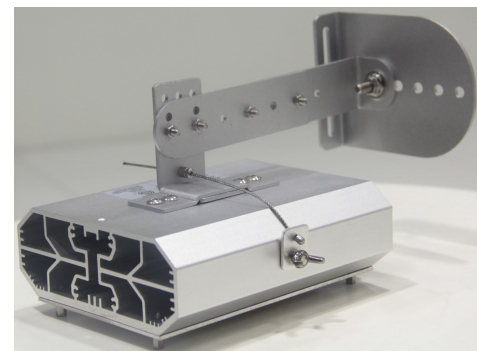

### Specifications

Part Number	MLLG-LED-RETRO5[A]-100-[Color]-[HV]
Watts	100W
Lumens	15,550
Replaces	400W Metal Halide
Lumens Per Watt	155
Voltage	100-277V [D]   347-480V [HV]
Frequency	50/60 hz
Life Hours	100,000 (L70) hours   50,000 hrs - driver
Color Temperature	4000K   5000K
CRI	75+
Beam Angle	120°
Operating Temperature	-35°C to +55°C
Dimmable	No
Dimensions	6.1" L x 5.9" W x 2.75" H
Net Weight	4.5
Mounting	Multiple mounting options
Warranty	10 years

### Features

MyLEDLightingGuide 100 Watt Shoebox Retrofit wins in life rating, wattage savings, payback, CRI, and the ability to retrofit in 99% of existing Metal Halide and High Pressure Sodium fixtures.

LED Source: Nichia Corporation

Beam Angle: 120 degrees

IP Rating: these retrofit kits are not IP65 or above rated, they need to be installed inside an IP65 if used outdoors or in a wet environment.

Driver: Meanwell 100-277V or 480V High Voltage

### Options

480 VAC [HV]			
--------------	--	--	--